



ALL-IN-ONE DESIGN



**NOW AVAILABLE IN
DARK BRONZE!**



- Perfect for parks, parking lots, school campuses, etc.
- Advanced new LiFePO4 battery lasts at least 2000 charge cycles and will last three nights with one day charge (motion sensing mode).
- 8W comparable to 70W HID.
- 30W comparable to 250W HID.
- Easily programmable via remote control.
- Built-in motion sensor, photo control & status indicator.
- For photometric data, see pages 4 (8W) & 5 (30W).
- For cold weather projects use our SL-SAL products. (scan for more info below)



SCAN FOR INFO ON SL-SAL



BATTERY
CHARGE TIME



BATTERY
CHARGE TEMP



BATTERY
LIFE



REPLACEABLE
BATTERY



TYPE III
OPTICS



OPERATING TEMP



100,000hrs
RATED LIFE

PART #	UPC	COMPARABLE TO	LUMENS	CCT	EPA	FINISH	DIMENSIONS
RP-SAL-8W-50K-SF-GY-G2	844006080150	70W HID	1600	5000K	1.824	GREY	20 x 12 x 3 in.
RP-SAL-30W-50K-SF-GY-G2	844006080235	250W HID	6000		4.788		36 x 16.75 x 3.75 in.
RP-SAL-8W-50K-SF-DB-G2	844006088545	70W HID	1600		1.824	DARK BRONZE	20 x 12 x 3 in.
RP-SAL-30W-50K-SF-DB-G2	844006088552	250W HID	6000		4.788		36 x 16.75 x 3.75 in.

OPERATING MODES  TIMER  MOTION SENSING



Light Efficient Design

847.380.3540 • led-llc.com • sales@led-llc.com



solera-solar.com



G2 SOLAR AREA LIGHT



OFF-GRID

PART NUMBER BUILDER

MFR	PRODUCT	WATTAGE	COLOR TEMP	BRACKET	FINISH	GENERATION
RP	SAL			SF		G2
(REMPHOS)	(SOLAR AREA LIGHT)	8W 30W	30K 50K 40K AMB	SF = ADJUSTABLE SLIP FITTER BRACKET	GY (GREY) DB (DARK BRONZE)	(GENERATION 2)

EXAMPLE PART NUMBER RP-SAL-8W-50K-SF-GY-G2

PLEASE NOTE, THE RP-SAL COMES STANDARD WITH THE ADJUSTABLE SLIP-FITTER BRACKET ONLY. SEE ORDERING GUIDE FOR ADDITIONAL BRACKETS AVAILABLE FOR PURCHASE.

ORDERING GUIDE - CASE QT = 1



PART #	UPC	QUICK SHIP	LUMENS	WATTAGE	LPW	RECCOMENDED MOUNTING HEIGHT
RP-SAL-8W-30K-SF-GY-G2	844006080266		1600	8	200	15FT
RP-SAL-8W-40K-SF-GY-G2	844006080280		1600	8	200	15FT
RP-SAL-8W-50K-SF-GY-G2	844006080150	✓	1600	8	200	15FT
RP-SAL-30W-30K-SF-GY-G2	844006080327		6000	30	200	20FT
RP-SAL-30W-40K-SF-GY-G2	844006080334		6000	30	200	20FT
RP-SAL-30W-50K-SF-GY-G2	844006080235	✓	6000	30	200	20FT
 RP-SAL-8W-AMB-SF-GY-G2	844006080310		284	AMB	N/A	15FT
 RP-SAL-30W-AMB-SF-GY-G2	844006080358		806	AMB	N/A	20FT
RP-SAL-8W-30K-SF-DB-G2	197810001331		1600	8	200	15FT
RP-SAL-8W-40K-SF-DB-G2	197810001348		1600	8	200	15FT
RP-SAL-8W-50K-SF-DB-G2	844006088545	✓	1600	8	200	15FT
RP-SAL-30W-30K-SF-DB-G2	197810001317		6000	30	200	20FT
RP-SAL-30W-40K-SF-DB-G2	197810001324		6000	30	200	20FT
RP-SAL-30W-50K-SF-DB-G2	844006088552	✓	6000	30	200	20FT
 RP-SAL-8W-AMB-SF-DB-G2	844006088569		284	AMB	N/A	15FT
 RP-SAL-30W-AMB-SF-DB-G2	844006088576		806	AMB	N/A	20FT

Light Efficient Design

847.380.3540 • led-llc.com • sales@led-llc.com



DIMENSIONS

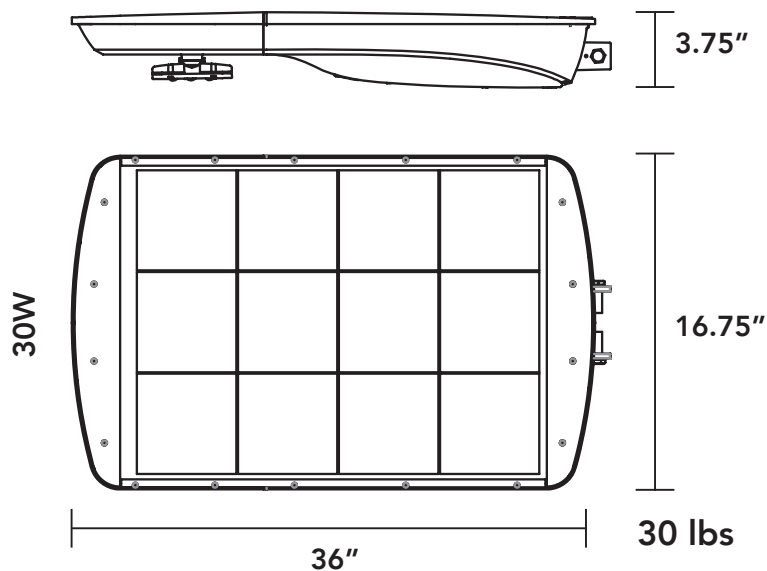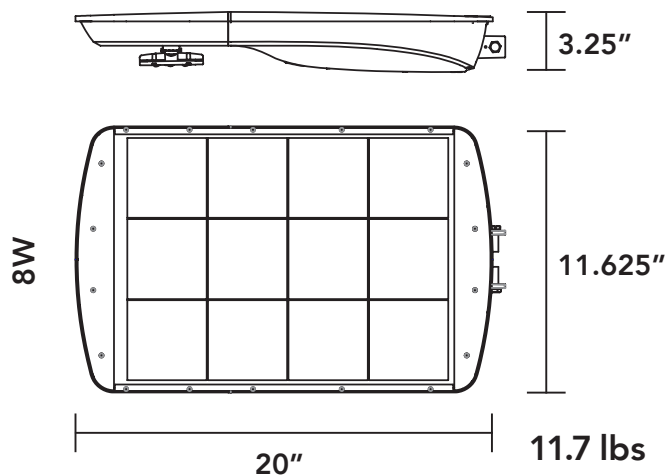


Light Efficient Design

847.380.3540 • led-llc.com • sales@led-llc.com


PHOTOMETRICS (8W)

FOOT CANDLES	ISO-LINE COLOR	
1 FC	BLACK	
0.5 FC	MAGENTA	
0.1 FC	BLUE	


ILLUMINANCE (FC)




MOUNTING HEIGHT : 8FT

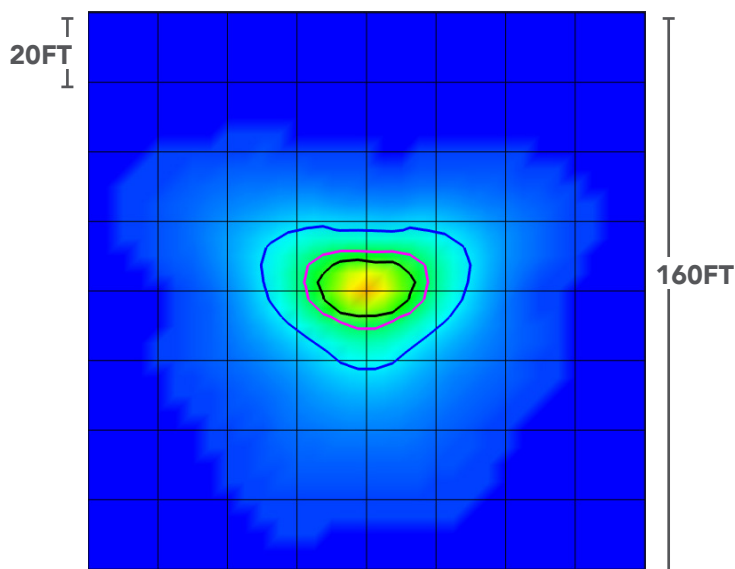

MOUNTING HEIGHT : 12FT

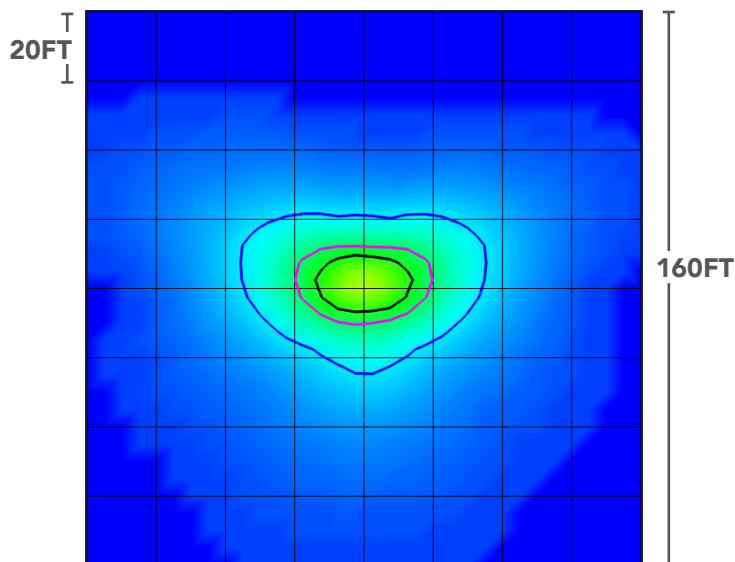

MOUNTING HEIGHT : 15FT

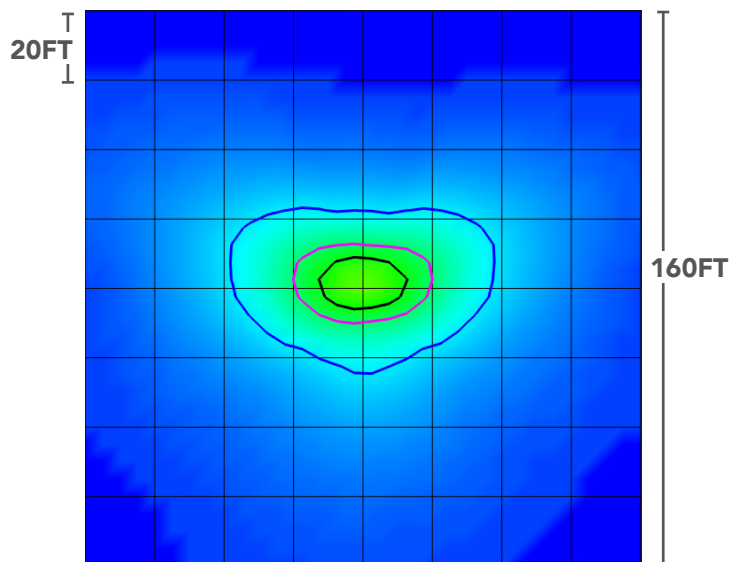


Light Efficient Design

847.380.3540 • led-llc.com • sales@led-llc.com


PHOTOMETRICS (30W)

FOOT CANDLES	ISO-LINE COLOR	
1 FC	BLACK	
0.5 FC	MAGENTA	
0.1 FC	BLUE	


ILLUMINANCE (FC)




MOUNTING HEIGHT : 15FT

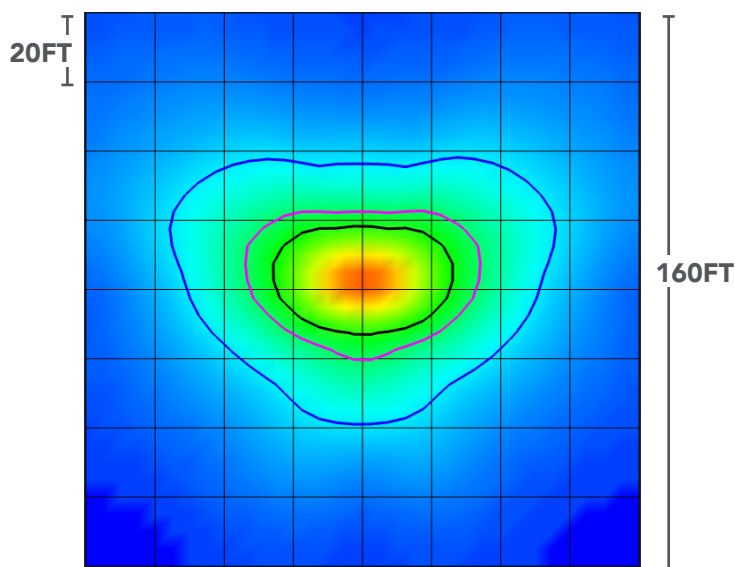

MOUNTING HEIGHT : 20FT

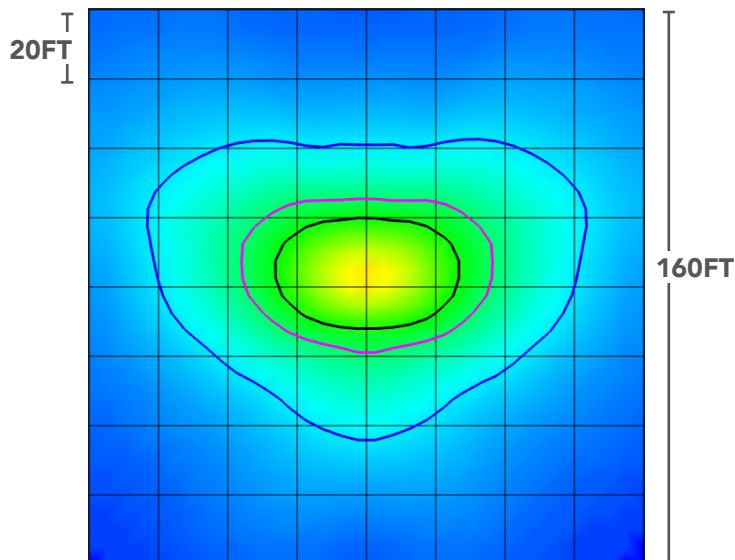

MOUNTING HEIGHT : 25FT

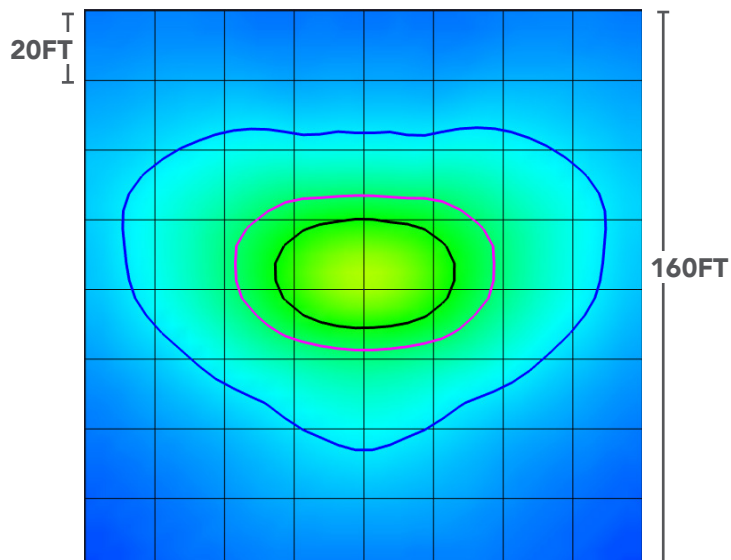

Light Efficient Design

847.380.3540 • led-llc.com • sales@led-llc.com

SOLAR AREA LIGHT ACCESSORIES - CAN BE USED WITH G1 & G2 RP-SAL

PART #	DESCRIPTION	PART #	DESCRIPTION
RP-SAL-BKT-8W-RP-G1	8W ROUND POLE BRACKET - GREY	RP-SAL-BKT-8W-RP-DB	8W ROUND POLE BRACKET - DARK BRONZE
RP-SAL-BKT-8W-SP-G1	8W SQUARE POLE BRACKET - GREY	RP-SAL-BKT-8W-SP-DB	8W SQUARE POLE BRACKET - DARK BRONZE
RP-SAL-BKT-8W-TN-G1	8W TRUNNION BRACKET - GREY	RP-SAL-BKT-8W-TN-DB	8W TRUNNION BRACKET - DARK BRONZE
RP-SAL-BKT-30W-RP-G1	30W ROUND POLE BRACKET - GREY	RP-SAL-BKT-30W-RP-DB	30W ROUND POLE BRACKET - DARK BRONZE
RP-SAL-BKT-30W-SP-G1	30W SQUARE POLE BRACKET - GREY	RP-SAL-BKT-30W-SP-DB	30W SQUARE POLE BRACKET - DARK BRONZE
RP-SAL-BKT-30W-TN-G1	30W TRUNNION BRACKET - GREY	RP-SAL-BKT-30W-TN-DB	30W TRUNNION BRACKET - DARK BRONZE
RP-SAL-REMOTE-G1*	REMOTE CONTROL		
RP-SAL-BIRDBGUARD	DETERS BIRDS FROM PERCHING ON FIXTURE		
RP-SAL-CHARGER-G1-60W	AC CHARGER		
RP-SAL-BATTERY-8W-G1	REPLACEMENT BATTERY FOR 8W		
RP-SAL-BATTERY-30W-G1	REPLACEMENT BATTERY FOR 30W		

* INCLUDED STANDARD W/ EACH FIXTURE ORDERED.



ADJUSTABLE SLIP-FITTER
BRACKET (SF)
(included w/quick ship models)




ROUND POLE BRACKET (RP)



SQUARE POLE BRACKET (SP)










TRUNNION BRACKET (TN)



BIRD GUARD

BRACKET GUIDE

ITEM	SLIP FITTER MOUNTING	U-TRUNNION MOUNTING	SQUARE-HOOP MOUNTING	ROUND -HOOP MOUNTING
8W SOLAR AREA LIGHT		 1. WALL MOUNTED 2.SQUARE POLE ABOVE 3.94"	 1. ROUND POLE: 1.96" – 3.54" 2.SQUARE POLE: 1.96" – 3.54"	 1. ROUND POLE: 1.96" – 4.33"
30W SOLAR AREA LIGHT		 1. WALL MOUNTED 2.SQUARE POLE ABOVE 4.72"	 1. ROUND POLE: 2.36" – 3.94" 2.SQUARE POLE: 1.97" – 3.94"	 1. ROUND POLE: 1.96" – 4.72"

*NOTE - BRACKETS ARE ADJUSTABLE TO FIT ON POLES WITHIN THE DIMENSIONS SHOWN ABOVE
EX. SLIP FITTER BRACKET CAN FIT ON A POLE BETWEEN 1.77" – 2.36"

Light Efficient Design

847.380.3540 • led-llc.com • sales@led-llc.com



solera-solar.com