



The Solera Solar Lighting Flood Light features an all-in-one design. The solar panel, light engine and battery are built right into the LED fixture. No need for a power source, which eliminates the need for wiring and trenching.

ALL-IN-ONE  
DESIGN

RP-SFL-MS-G1\*  
(Garden Stake)

- Comparable to 150W HID.
- Standard operating mode: 4 hours of 100% brightness and then 25% for the remainder of the night with one charge.
- Adjustable LED light engine delivers light exactly where you need it.
- Li-Ion battery lasts at least 1500 charge cycles.
- Battery includes a heat isolating blanket.
- 165 lumens per watt.
- Perfect for signage, billboards, walls, pathways and garden features.
- Panel dimensions (L x W): 26" x 11"  
Height (adjustable) 16" to 21"
- See pg. 2 for photometrics.



BATTERY  
CHARGE TIME



BATTERY  
CHARGE TEMP



BATTERY  
LIFE\*



REPLACEABLE  
BATTERY



BEAM ANGLE



-4°F TO 140°F

OPERATING TEMP



50,000hrs  
RATED LIFE

PART #	UPC	COMPARES TO	LUMENS	COLOR	LISTINGS
SL-SFL-20W-40K-BK-G2	844006062477	150W	2000	4000K	CE FC

#### ACCESSORIES




PART #	DESCRIPTION	OPERATING MODES
RP-SFL-MS-G1*	GARDEN STAKE	☀️ CONSTANT BRIGHTNESS   ⌚ TIMER

\* GARDEN STAKE IS AN ACCESSORY AND IS SOLD SEPARATELY



## Light Efficient Design

847.380.3540 • led-llc.com • sales@led-llc.com

PHOTOMETRICS

FOOT CANDLES	ISO-LINE COLOR
1 FC	BLACK 
0.5 FC	MAGENTA 
0.1 FC	BLUE 

ILLUMINANCE (FC)

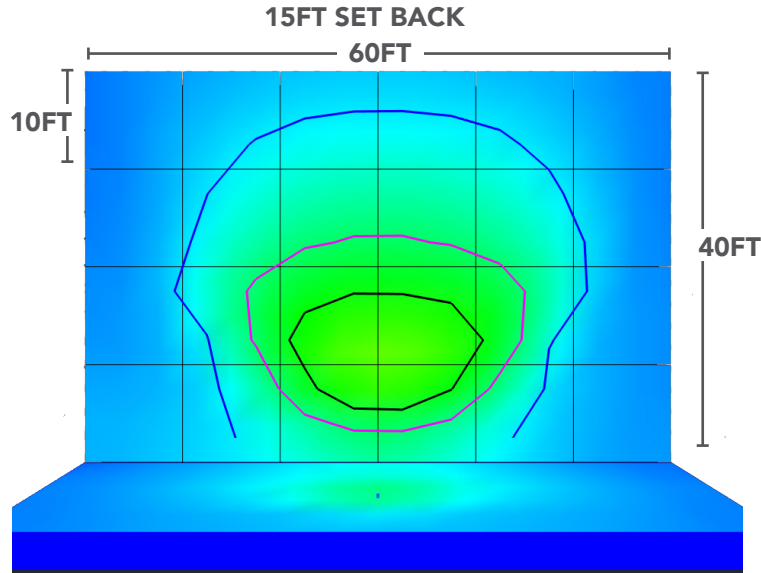

Light Efficient Design

847.380.3540 • led-llc.com • sales@led-llc.com