

Solera 
FREE TO SHINE

by **Light Efficient Design**



PART #	COMPARES TO	WATTAGE	LUMENS	COLOR	EPA	DIMENSIONS	LISTINGS
HYBRID SOLAR AREA LIGHT							
SL-SAL-HYB-30W-40K-SF-BK-G2	250W	30W	5900	4000K	4.45	FIXTURE 11.2" x 3.5" x 16.3" SOLAR PANEL 15.9" x 31.5"	
SL-SAL-HYB-50W-40K-SF-BK-G2	400W	50W	9800	4000K	6.1	FIXTURE 11.2" x 7.0" x 16.3" SOLAR PANEL 31.8" x 31.5"	
OFF-GRID SOLAR AREA LIGHT							
RP-SAL-8W-50K-SF-GY-G2	70W	8W	1600	5000K	1.82	20.0" x 12.0" x 3.0"	
RP-SAL-8W-50K-SF-DB-G2							
RP-SAL-30W-50K-SF-GY-G2	250W	30W	6000	5000K	4.79	36.0" x 16.8" x 3.8"	
RP-SAL-30W-50K-SF-DB-G2							
● RP-SAL-8W-AMB-SF-GY-G2	70W	8W	284	580nm AMBER	1.82	20.0" x 12.0" x 3.0"	
● RP-SAL-8W-AMB-SF-DB-G2							
● RP-SAL-30W-AMB-SF-GY-G2	250W	30W	806	580nm AMBER	4.79	36.0" x 16.8" x 3.8"	
● RP-SAL-8W-AMB-SF-DB-G2							
SL-SAL-OG-30W-50K-SF-BK-G2	250W	30W	5900	5000K	4.45	FIXTURE 11.2" x 3.5" x 16.3" SOLAR PANEL 15.9" x 31.5"	
SL-SAL-OG-50W-50K-SF-BK-G2	400W	50W	9800	5000K	6.1	FIXTURE 11.2" x 7.0" x 16.3" SOLAR PANEL 31.8" x 31.5"	

OPERATING MODES | TIMER MOTION SENSING

EXCLUSIVE LONG-LASTING BATTERY TURTLE FRIENDLY ● GRAY ● DARK BRONZE

FOR LISTING STATUS GO TO LED-LLC.COM

SIX MODELS TO CHOOSE FROM WITH HID EQUIVALENCE FROM 70W TO 400W. The off-grid fixtures are powered entirely by the sun, requiring no trenching or wiring – free to shine. Hybrid models are powered by the sun and backed up by line-voltage for guaranteed light every night.

HYBRID 365 | POWERED BY THE SUN & BACKED-UP BY LINE-VOLTAGE **OFF-GRID | 100% POWERED BY THE SUN**



SL-SAL-30W →

↑ SL-SAL-50W

RP-SAL-50/30W ↑

SEE PGS 10 + 11 FOR OUR NEW POLE OFFERING + ACCESSORIES

	CERTIFIED BATTERY	RP-SAL	SL-SAL	RP-SAL	SL-SAL	BATTERY LIFE	REPLACEABLE BATTERY	REMOTE CONTROL	RP-SAL	SL-SAL	MOTION SENSING	100,000hrs RATED LIFE



IMPROVE PEDESTRIAN SAFETY...




← SL-SBL-2W

OFF-GRID SOLAR BOLLARD LIGHT

PART #	COMPARES TO	LUMENS	COLOR	DIMENSIONS	LISTINGS
SL-SBL-2W-27K-BK-G1	30W HALOGEN	266	2700K	8" x 30"	CE FC
SL-SBL-2W-40K-BK-G1			4000K		

OPERATING MODE | DUSK TO DAWN

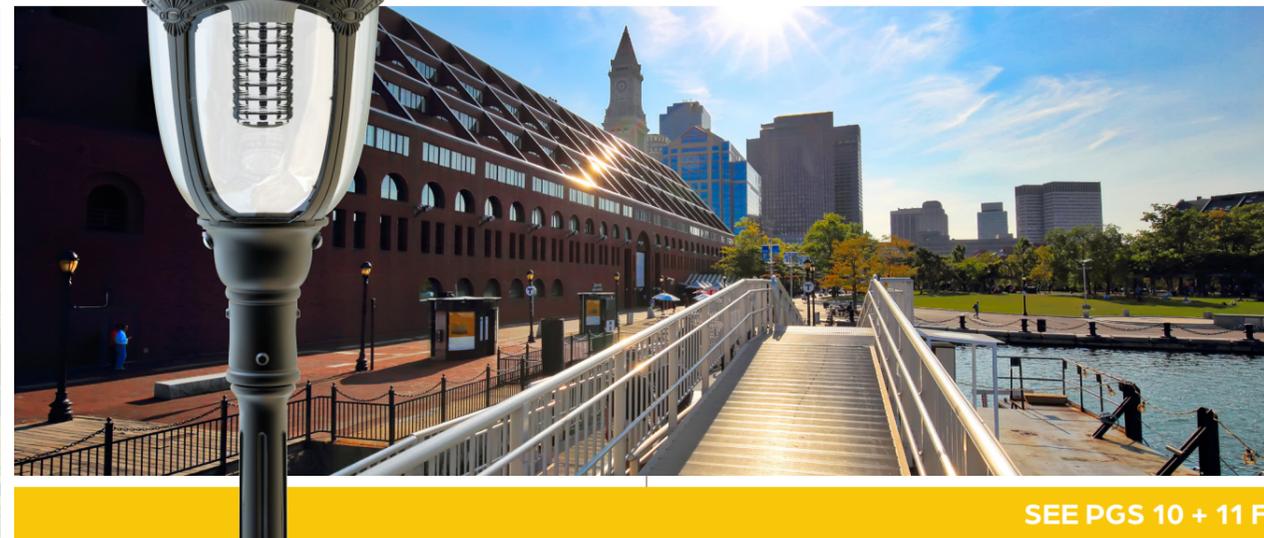

SL-SPT-20W ↑

OFF-GRID SOLAR POST TOP LIGHT

PART #	COMPARES TO	LUMENS	COLOR	DIMENSIONS	EPA	LISTINGS
SL-SPT-20W-30K-SF-G2	150W HID	2000	3000K	16" x 32"	2.2	CE FC
SL-SPT-20W-40K-SF-G2			4000K			

OPERATING MODES | DUSK TO DAWN | TIMER | MOTION SENSING



↑ SL-CPT

OFF-GRID SOLAR PATHWAY LIGHT

PART #	COMPARES TO	LUMENS	COLOR	DIMENSIONS	EPA	LISTINGS
SL-CPT-25L-30K-BK-G1	150W	2500	3000K	21.3" x 13.4"	1.0 SF	CE FC
SL-CPT-25L-40K-BK-G1			4000K			

OPERATING MODES | CONSTANT BRIGHTNESS | TIMER | MOTION SENSING

- 3 YEAR WARRANTY
- 8-9 HRS BATTERY CHARGE TIME
- 32°F TO 149°F BATTERY CHARGING TEMP
- UP TO 18 HRS BATTERY LIFE
- 120° BEAM ANGLE
- 13°F TO 140°F OPERATING TEMP
- 100,000hrs RATED LIFE

- 3 YEAR WARRANTY
- 7-8 HRS BATTERY CHARGE TIME
- 32°F TO 149°F BATTERY CHARGING TEMP
- UP TO 30 HRS BATTERY LIFE
- 360° BEAM ANGLE
- 4°F TO 149°F OPERATING TEMP
- 100,000hrs RATED LIFE

- 3 YEAR WARRANTY
- 7-8 HRS BATTERY CHARGE TIME
- 32°F TO 122°F BATTERY CHARGING TEMP
- UP TO 30 HRS BATTERY LIFE *
- 160° BEAM ANGLE
- 4°F TO 122°F OPERATING TEMP
- 50,000hrs RATED LIFE

* ON 2HR + SENSOR MODE.



ADJUSTABLE – GET LIGHT EXACTLY WHERE YOU NEED IT...

THREE FLEXIBLE & POWERFUL, OFF-GRID MODELS UP TO 150W HID. Perfect for entrance signs, landscape features and more. The display light collects sun and cast light downwards. The flood light has an adjustable light array to aim at the desired object to illuminate.



← SL-SFL-20W

OFF-GRID SOLAR FLOOD LIGHT

PART #	COMPARES TO	LUMENS	COLOR	DIMENSIONS	ADJ HEIGHT	LISTINGS
SL-SFL-20W-40K-BK-G2	150W HID	2000	4000K	26" x 11" (PANEL w/LIGHT)	16" TO 21"	CE FC

OPERATING MODE | ☀️ CONSTANT BRIGHTNESS ⌚ TIMER



SL-SDL-20W ↗️

OFF-GRID SOLAR DISPLAY LIGHT*

PART #	COMPARES TO	LUMENS	COLOR	DIMENSIONS	LISTINGS
SL-SDL-2FT-40K-BK-G2	70W HID	750	4000K	23.6" x 4.3" x 4.3"	CE FC
SL-SDL-20W-40K-BK-G2	150W HID	2000	4000K	47.2" x 4.3" x 4.3"	

ACCESSORIES

OPERATING MODES

RP-SDL-BK-LB | 7" CLAMP MOUNT BRKT (2 PK)

☀️ CONSTANT BRIGHTNESS | ⌚ TIMER

* INCLUDES SURFACE MOUNT BRKT



← SL-SMFL-10W

OFF-GRID SOLAR MULTIFUNCTIONAL FLOOD LIGHT

PART #	COMPARES TO	LUMENS	COLOR	DIMENSIONS	LISTINGS
SL-SMFL-10W-40K-BK-G1	70W HID	1100	4000K	9.1" x 6.5" (LIGHT) 13.6" x 9.3" (PANEL)	CE FC

OPERATING MODES | ☀️ CONSTANT BRIGHTNESS ⌚ TIMER 🚶 MOTION SENSING

- 3 YEAR WARRANTY
- 8-9 HRS BATTERY CHARGE TIME
- 32°F TO 115°F BATTERY CHARGING TEMP
- UP TO 24 HRS BATTERY LIFE
- 120° BEAM ANGLE
- 4°F TO 140°F OPERATING TEMP
- 50,000hrs RATED LIFE

- 3 YEAR WARRANTY
- 8-9 HRS BATTERY CHARGE TIME
- 32°F TO 113°F BATTERY CHARGING TEMP
- UP TO 24 HRS BATTERY LIFE
- 120° BEAM ANGLE
- 4°F TO 140°F OPERATING TEMP
- 50,000hrs RATED LIFE

- 3 YEAR WARRANTY
- 8-9 HRS BATTERY CHARGE TIME
- 32°F TO 140°F BATTERY CHARGING TEMP
- UP TO 24 HRS BATTERY LIFE
- 90° BEAM ANGLE
- 4°F TO 140°F OPERATING TEMP
- 50,000hrs RATED LIFE



ALL-IN-ONE DESIGN...



FOUR OFF-GRID MODELS TO HELP CAST LIGHT WHEREVER IT IS NEEDED. Large wall pack fixtures with adjustable solar panels provide powerful performance to the sides of buildings. Smaller wall pack and rugged step lights can provide safety and security around decks, staircases and more.



BUILT-IN LED ENERGY INDICATOR



COMPACT DESIGN — FITS ALMOST ANYWHERE

SL-SWL ↗

SL-SWL-20W ↗

SL-SSL ↗

OFF-GRID SOLAR WALL PACKS

PART #	COMPARES TO	LUMENS	COLOR	DIMENSIONS	LISTINGS
SL-SWL-7W-40K-BK-G2	50W HID	700	4000K	8" x 9" x 4"	CE FC
SL-SWL-15W-40K-BK-G2	100W HID	1500		10" x 12" x 5"	

OPERATING MODES | DUSK TO DAWN TIMER MOTION SENSING

OFF-GRID SOLAR MINI WALL PACK

PART #	COMPARES TO	LUMENS	COLOR	DIMENSIONS	LISTINGS
SL-SWL-20W-40K-BK-G2	150W HID	2000	4000K	8" x 5" x 3"	CE FC

OPERATING MODES | DUSK TO DAWN TIMER MOTION SENSING

OFF-GRID SOLAR STEP LIGHT

PART #	COMPARES TO	LUMENS	COLOR	DIMENSIONS	LISTINGS
SL-SSL-1W-40K-GY-G2	20W HALOGEN	50	4000K	8" x 5" x 3"	CE FC

OPERATING MODE | DUSK TO DAWN

- 3 YEAR WARRANTY
- 7 HRS BATTERY CHARGE TIME
- 32°F TO 149°F BATTERY CHARGING TEMP
- UP TO 50 HRS BATTERY LIFE
- 100° BEAM ANGLE
- 5°F TO 113°F OPERATING TEMP
- 35,000hrs RATED LIFE

- 3 YEAR WARRANTY
- 7 HRS BATTERY CHARGE TIME
- 32°F TO 149°F BATTERY CHARGING TEMP
- UP TO 50 HRS BATTERY LIFE
- 120° BEAM ANGLE
- 13°F TO 140°F OPERATING TEMP
- 35,000hrs RATED LIFE

- 3 YEAR WARRANTY
- 7 HRS BATTERY CHARGE TIME
- 32°F TO 149°F BATTERY CHARGING TEMP
- UP TO 50 HRS BATTERY LIFE
- 120° BEAM ANGLE
- 13°F TO 149°F OPERATING TEMP
- 35,000hrs RATED LIFE

AVAILABLE W/ MAGNETIC MOUNTING



THREE POLE STYLES TO CHOOSE FROM. Our standard pole configuration includes a 2.375 IN top tenon mounting bracket. Available in black, dark bronze or gray to match our area light and post top fixtures.

STRAIGHT STEEL ANCHOR BASE*

PART #	MOUNTING HT	MAX EPA				SHAFT DIA	WALL THICKNESS	ANCHOR BOLT DIA	BOLT CIRCLE	BASE PLATE SQ	BASE PLATE HT
		(80)	(90)	(100)	(120)						
SQUARE											
SL-RPSQ-10-4-11	10'	25.7	20.8	16.8	11.8	4"	11 GA	.75" X 20"	8.5"	8"	.75"
SL-RPSQ-15-4-11	15'	15.1	12.3	9.8	7.0				11"	11"	
SL-RPSQ-20-5-11	20'	16.0	12.9	10.4	7.4	5"	7 GA	1" X 40"	11.5"	12"	1"
SL-RPSQ-25-5-7	25'	17.5	14.2	11.4	8.1				11.5"	12"	
SL-RPSQ-30-6-7	30'	17.9	14.5	11.7	8.3	6"					
ROUND											
SL-RSP-8-3-11	8'	11.2	8.4	6.2	3.7	3"	11 GA	.75" X 20"	8.5"	8"	.75"
SL-RSP-12-3-11	12'	6.9	5.0	3.9	2.1				8.5"	8"	
SL-RSP-14-4-11	14'	11.7	8.9	7.1	4.0	4"					
SL-RSP-25-5-7	25'	12.0	9.2	7.5	4.2	5"	7 GA	1" X 40"	10"	10"	1"

* SPECIAL ORDER ONLY.

TAPERED STEEL ANCHOR BASE*

PART #	MOUNTING HT	MAX EPA				SHAFT DIAMETER		WALL THICKNESS	ANCHOR BOLT DIA	BASE PLATE SQ	BASE PLATE HT
		(80)	(90)	(100)	(120)	BASE	TOP				
SQUARE											
SL-STP-20-5211	20'	14.4	11.6	9.4	6.6	5.25"	3.25"	11 GA	1" X 40"	11"	1"
SL-STP-25-6211	25'	13.1	10.6	8.5	6.0	6.25"	3.75"			12"	
SL-STP-30-6211	30'	8.9	7.2	5.8	4.0	6.25"	3.25"				
ROUND											
SL-RTS-20-6511	20'	28.6	23.2	18.7	13.0	6.25"	3.7"	11 GA	1" X 40"	11"	1"
SL-RTS-25-7011	25'	22.0	17.8	14.4	10.0	7"	3.5"			11"	
SL-RTS-30-8011	30'	22.1	17.9	14.5	10.0	8"	3.8"			12"	
SL-RTS-35-8511	35'	19.3	15.6	12.6	9.0	8.5"	3.6"				

* SPECIAL ORDER ONLY.

MOUNTING POLES + ACCESSORIES



STRAIGHT STEEL DIRECT BURIAL*

PART #	MOUNTING HT	MAX EPA				SHAFT DIA	WALL THICKNESS	BURIAL DEPTH
		(80)	(90)	(100)	(120)			
SQUARE								
SL-RPSQ-10-4-11-EMB	10'	25.7	20.8	16.8	11.8	4"	11 GA	3"
SL-RPSQ-15-4-11-EMB	15'	15.1	12.3	9.8	7.0			4"
SL-RPSQ-20-5-11-EMB	20'	16.0	12.9	10.4	7.4	5"		
SL-RPSQ-25-6-7-EMB	25'	27.5	22.3	18.0	12.6	6"	7 GA	5"
ROUND								
SL-RSP-8-3-11-EMB	8'	11.2	8.4	6.2	3.7	6.25"	11 GA	3"
SL-RSP-14-4-11-EMB	14'	11.7	8.9	7.1	4.0	7"		4"
SL-RSP-20-5-7-EMB	20'	16.4	12.6	10.0	6.6	8"	7 GA	

* SPECIAL ORDER ONLY.

SOLAR AREA LIGHT ACCESSORIES

FOR USE W/ SL-SAL OFF-GRID + HYBRID MODELS		FOR USE W/ RP-SAL OFF-GRID MODELS	
PART #	DESCRIPTION	PART #	DESCRIPTION
SL-SAL-BKT-RP-BK-G1	ROUND POLE BRACKET	RP-SAL-BKT-8W-RP-XX	ROUND POLE BRACKET FOR 8W
SL-SAL-BKT-SP-BK-G1	SQUARE POLE BRACKET	RP-SAL-BKT-8W-SP-XX	SQUARE POLE BRACKET FOR 8W
SL-SAL-BKT-ST-3-BK-G1	TENON ADAPTER FOR 3" SQUARE POLE	RP-SAL-BKT-8W-TN-XX	TRUNNION BRACKET FOR 8W
SL-SAL-BKT-RT-3-BK-G1	TENON ADAPTER FOR 3" ROUND POLE	RP-SAL-BKT-30W-RP-XX	ROUND POLE BRACKET FOR 30W
SL-SAL-BKT-WM-BK-G1	WALL MOUNT BRACKET	RP-SAL-BKT-30W-SP-XX	SQUARE POLE BRACKET FOR 30W
ALL MODELS INCLUDE A STANDARD SLIP FITTER MOUNTING BRACKET.		RP-SAL-BKT-30W-TN-XX	TRUNNION BRACKET FOR 30W
CONTACT US FOR ADDITIONAL BRACKET OPTIONS.		RP-SAL-REMOTE-G1	REMOTE CONTROL (INCLUDED W/ EACH FIXTURE)
		RP-SAL-BIRDBGUARD	DETERS BIRDS FROM PERCHING ON FIXTURE

XX = G1 (GRAY) OR DB (DARK BRONZE)





CORPORATE HQ & TRAINING CENTER • CARY, IL | INNOVATION & MANUFACTURING CENTER • Middleton, MA
847.380.3540 • led-llc.com • sales@led-llc.com



solera-solar.com